

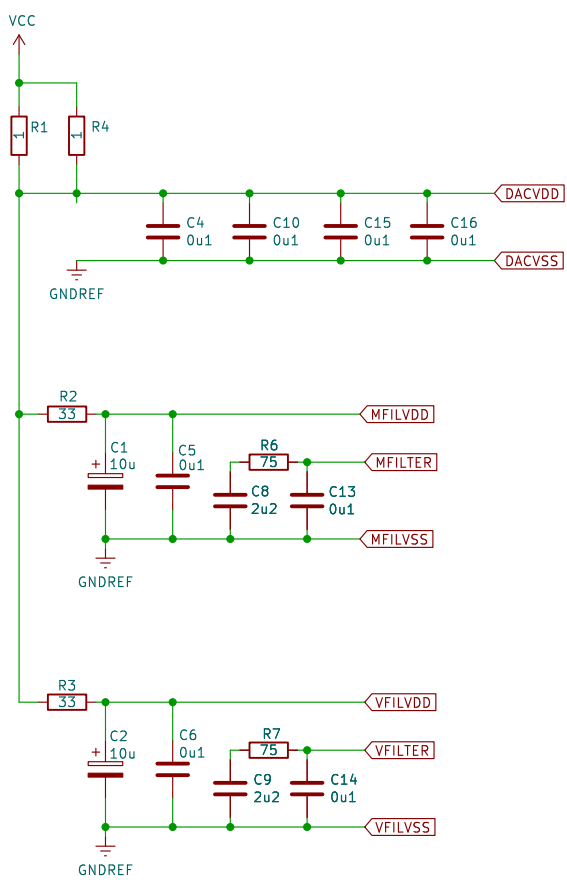
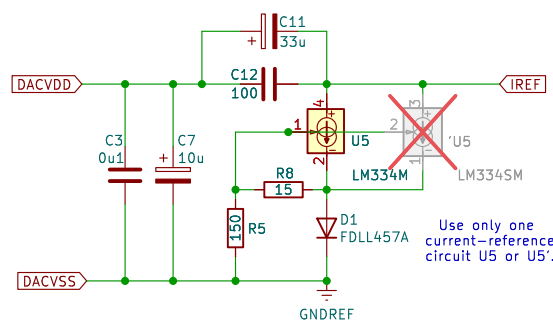


Config Resistors
R9 (MD17) - 5422-5428 - 0/1 - zero wait enable/disable.
R10 (MD19) - 5429 - 0/1 - enable 2070 address decode.
R11, R12 (MD25/26) - DRAM speed (D0 - 50MHz, D1 - 44MHz, D2 - 41MHz, D3 - 38MHz)
R13 (MD27) - DRAM timing high/normal (0/1) performance
R14 (MD28) - DRAM mode - multi CAS/WE (0/1)
Default - all installed except R10 (and R9 for 5429)

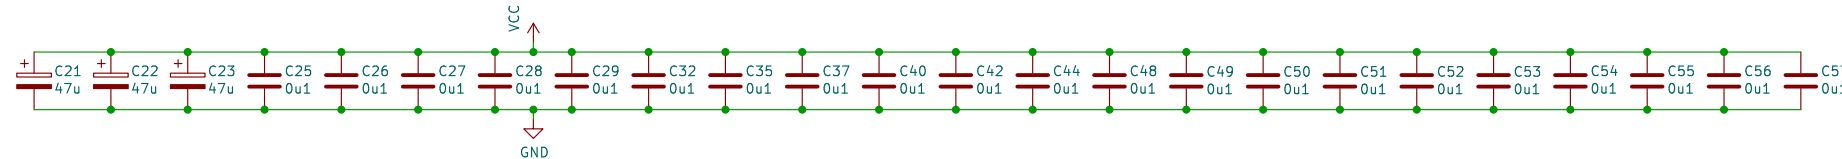

Optional.
Use crystal (one of Y1 or Y2) if BOSC from ISA is not used.
Do not install R31 if crystal used.

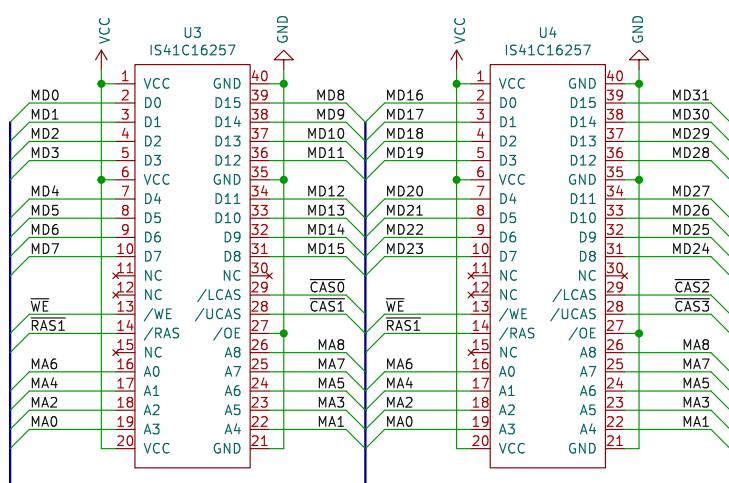